


NEW!

tesa® double-sided tapes for floor laying – new range for permanent and removable applications

Two ranges of floor laying tapes with six different products – perfectly adapted for every application and budget.

Different applications require different product performance profiles. With its improved assortment and the introduction of a new removable floor laying tape, tesa reflects customer needs through a combination of performance and economy.

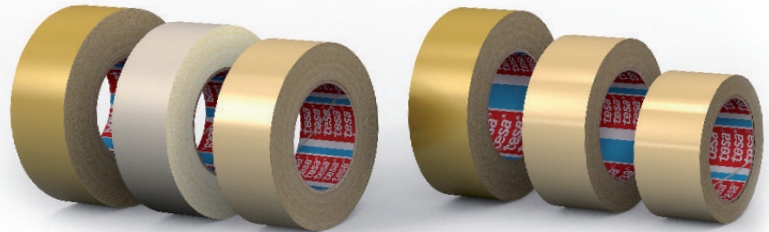

New categories reflect the market needs

Corresponding to the application, simply select between removable products and products for reliable long term applications.


■ Removable range

- For fairs & exhibitions and all other kind of events as well as for areas where a change of the flooring material is often required
- Even for rough surfaces and sensitive surfaces, as well as for structured laying materials

■ Permanent range

- The alternative to liquid glue, especially during renovations, as there is no drying time & no odor
- Proven quality for decades

Improved Product Assortment

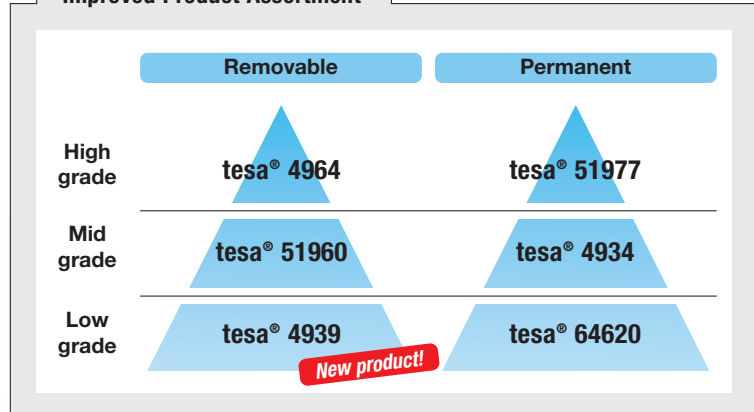

tesa® double-sided tapes for floor laying – the right choice for every need



tesa® 4964

- Cloth backing with natural rubber adhesive
- Very high adhesion and therefore, especially suitable for rough surfaces and structured laying materials
- Very good removability* due to the well balanced adhesive system
- Very easily tearable by hand




tesa® 51977

- Filmic backing with high adhesion tackified acrylic adhesive
- Outstanding bonding performance / comparable to liquid glue solutions
- Even for very demanding applications such as rough surfaces, textured carpets or highly strained areas
- Suitable for floor heating systems
- Very easily tearable by hand




tesa® 51960

- Scrim reinforced filmic backing with differential tackified acrylic adhesive system
- Lower adhesion level on the open side (better removability) and high adhesion level on the covered side for a secure bonding to the flooring material
- Residue free removability for up to 5 years*.
- Easily tearable by hand



tesa® 4934

- Scrim-cloth backing with high tack rubber adhesive system
- High immediate bonding level for fast and reliable jobs
- Easily tearable by hand



tesa® 4939

- PET-cloth backing with rubber adhesive
- Especially for short term use during fairs & exhibitions
- Residue free removability for up to 14 days*
- Tearable by hand (cutting device recommended)



tesa® 64620

- PP backing with rubber adhesive
- Especially for lower demanding applications, such as smooth surfaces and tiles
- Tearable by hand

* The removability needs to be tested and can not be guaranteed as there are many influencing factors which are beyond of tesa liability. Usage on natural stone surface is not recommended.

Technical data

Removable	Total Thickness [µm]	Adhesion to steel covered side [N/cm]	Adhesion to steel open side [N/cm]	Tensile strength [N/cm]
tesa® 4964	390	7,5	7,5	80
tesa® 51960	250	6,5	4,7	30
tesa® 4939	265	7,5	6	50
Permanent				
tesa® 51977	240	12	12	87
tesa® 4934	200	14,5	14,5	35
tesa® 64620	185	12	12	20

tesa® products prove their impressive quality day in, day out in demanding conditions and are regularly subjected to strict controls. All information and recommendations are provided to the best of our knowledge on the basis of our practical experience. Nevertheless tesa SE can make no warranties, express or implied, including, but not limited to any implied warranty of merchantability or fitness for a particular purpose. Therefore, the user is responsible for determining whether the tesa® product is fit for a particular purpose and suitable for the user's method of application. If you are in any doubt, our technical support staff will be glad to advise you.

HEADQUARTERS

tesa SE

Quickbornstrasse 24
20253 Hamburg, Germany
Phone: +49 40 4909 3400
Fax: +49 180 234 35 20
www.tesa.de